



BUILDING PROTECTION GUARDS  
SHADES  
SURFACES  
& PRE FAB STRUCTURES



# Building Protection Guards Includes

- Column Guards
- Corner Guards
- Speed Guards
- Wheel Stoppers
- E Guards
- D Guards
- K Guards
- Vinyl Wall Guard




## Corner Guards

Ferrotech corner protection guards for the corners of the rectangular columns in the parking areas are specially manufactured from high impact resistant rubber extruded in the desired profiles and sizes to safeguard the column from abrasion and collision. The compound used for the manufacture is a blend of natural rubber with SBR which is highly resistant to abrasion and all so designed for the extreme weather conditions prevailing in the middle east.

The standard sizes are

Model	Wing size
CRG-65	65
CRG-75	75
CRG-90	85
CRG-100	100

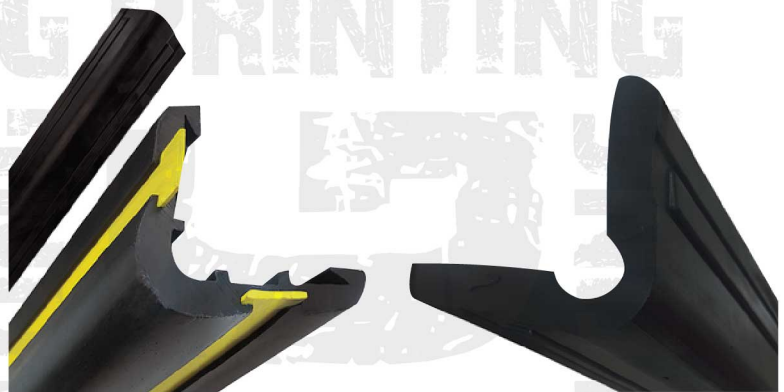

These sizes are also available with yellow reflective strip.


## Wall Guards

Ferrotech wall guards, cross section in the shape of alphabet 'E' also known as E-Guards are used to protect the round column and the wall in the ramp areas. It can be fixed horizontally or vertically depending upon the site requirements. The dual grooves provide countersunk recess for installation with bolts.

E-guards are also available with yellow strips

The standard sizes are

Model	Base	Thickness
WG 200 A	200	25
WG 200 B	200	50
WG 120 A	120	30

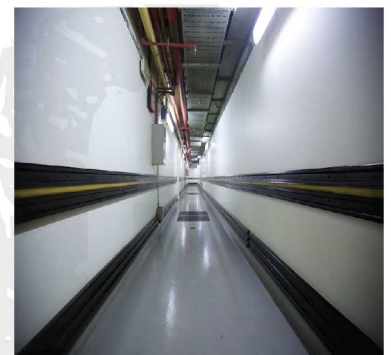

## Wheel Stoppers (k-Guards)

K guards also known as wheel stopper or car stopper is used in the parking area. Terozoidal in cross section. It is made of high impact resistant compounds and is resistant to abrasion.

Sizes available are 140 x 100mm.

K-guards are also available with yellow reflective strips



## D Guards

D guards are heavy duty extruded rubber bumpers protects the wall from damages from the impact of vehicles during loading and unloading. They are mainly used in the loading bays. They are also used as column guards by fixing vertically.



## Speed Guards

Ferrotech speed breakers are used in pathways in parking areas, service station etc for reducing the vehicle speed.

The standard width of speed guards is 400mm and is available in three different heights, 50mm, 65mm and 75mm at center and tapering to zero at the ends the length per piece is 500mm and for end piece it is 250mm. These are supplied in alternate black and traffic yellow color.



## Stair Nosing

Stair nosing are extruded rubber profiles, also known as L-beedings are used in the stair to provide grip and to avoid slippery conditions. The grooves are provided on the upper surface for this purpose. Sizes available are 60 x 40 and 50 x 50 mm. Other Sizes Can also be supplied upon request.



## Aluminum Stair Nosing:

Aluminium stair nosing with anti-slip black band for straight angles:

- Adapted for all floor covering type and thickness
- The black band provides anti-slip protection
- For a state-of-the-art stair finish
- Landing/stair harmony

